

HSVR-04HT HSVR-08HT1

HSVR - H.265+ MULTI PLATFORM



KEY FEATURES

Video Input and Transmission

- Self-adaptive HDTV/HDCVI/AHD/CVBS signal input
- Up to 2/4-ch 6 MP IP cameras input
- 8 MP/5 MP/4 MP HDTV video input and live view for HSVR-08HT1, and 5 MP/4 MP for HSVR-04HT
- Defogging function enabled for the supported analog cameras
- Long distance transmission over UTP and coaxial cable: max. 800m for 1080p and 1200m for 720p HDTV signal

Compression and Recording

- H.265+/H.265/H.264+/H.264 encoding for the main stream, and H.265/H.264 for the sub-stream of analog cameras
- Connectable to H.265+/H.265/H.264+/H.264 IP cameras
- H.265+ can be enabled to improve encoding efficiency and reduce data storage costs
- Full channel recording at up to 8 MP resolution

Video Output

- Simultaneous HDMI/VGA output
- HDMI output at up to 4K (3840 x 2160) resolution for HSVR-08HT1
- Separate CVBS output

Storage and Playback


- 1 SATA interface (up to 8 TB capacity per HDD)
- 4/8-ch synchronous playback
- Smart search for efficient playback
- Supports the 3rd party cloud storage (Dropbox/Google Drive/Microsoft OneDrive)

Smart Function

- Supports multiple VCA (Video Content Analytics) events for both analog and smart IP cameras
- Supports line crossing detection and intrusion detection of all channels, and 2-ch sudden scene change detection
- VCA information overlay in live view and smart playback
- VQD (Video Quality Diagnostics)
- Supports PTZ control via Omnicast VMS of Genetec protocol


Network & Ethernet Access

- Guarding Vision & MAZi DDNS (Dynamic Domain Name System) for easy network management
- 1 RJ45 10M/100M self-adaptive Ethernet interface for HSVR-04HT, and 1 RJ45 10M/100M/1000M self-adaptive Ethernet interface for HSVR-08HT1
- Output bandwidth limit configurable



SPECIFICATION	HSVR-04HT	HSVR-08HT1
Video/Audio Input		
Video compression	H.265+/H.265/H.264+/H.264	
Analog video input	4ch	8ch
	BNC interface (1.0 Vp-p, 75 Ω), supporting coaxitron connection	
HDTVl input	5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25	8 MP, 5 MP, 4 MP, 3 MP, 1080p30, 1080p25, 720p60, 720p50, 720p30, 720p25
AHD input	5 MP, 4 MP, 1080p25, 1080p30, 720p25, 720p30	
HDCVl input	4 MP, 1080p25, 1080p30, 720p25, 720p30	
CVBS input	PAL/NTSC	
IP video input	2ch	4ch
	up to 6 MP resolution/Supports H.265+/H.265/H.264+/H.264 IP cameras	
Audio compression	G.711u	
Audio input	4-ch, RCA (2.0 Vp-p, 1 KΩ)	
Video/Audio output		
CVBS output	1-ch, BNC (1.0 Vp-p, 75 Ω), resolution: PAL: 704 × 576, NTSC: 704 × 480	
HDMI/VGA output	1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024× 768/60Hz	VGA: 1-ch, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz HDMI: 1-ch, 4K (3840 × 2160)/30Hz, 2K (2560 × 1440)/60Hz, 1920 × 1080/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz
Encoding resolution	5 MP/4 MP/ 3 MP/1080p/720p/WD1/4CIF/VGA/CIF	8 MP/5 MP/4 MP/ 3 MP/1080p/720p/WD1/4CIF/VGA/CIF

SPECIFICATION	HSVR-04HT	HSVR-08HT1
Video/Audio output		
Frame rate Main Stream	5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps	8 MP@8fps/5 MP@12fps/4 MP@15fps/3 MP@18fps 1080p/720p/WD1/4CIF/VGA/CIF@25fps
Frame rate Sub-Stream	WD1/4CIF/CIF@25fps	
Video bit rate	32 Kbps to 10 Mbps	
Audio output	1-ch, RCA (Linear, 1 KΩ)	
Audio bit rate	64 Kbps	
Dual stream	Support	
Stream type	Video, Video & Audio	
Synchronous playback	4ch	8ch
Network management		
Remote connections	32	64
Network protocols	TCP/IP, PPPoE, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, NFS, iSCSI, UPnP™, HTTPS, ONVIF	
Hard disk		
SATA	1 SATA interface	
Capacity	Up to 8 TB capacity for each disk	
External interface		
Network interface	1, RJ45 10M/100M self-adaptive Ethernet interface	1, RJ45 10M/100M/1000M self-adaptive Ethernet interface
USB interface	2 × USB 2.0	Front: 1 × USB 2.0 Rear: 1 × USB 3.0
Serial interface	RS-485 (half-duplex)	
Alarm in/out	4/1	8/4
General		
Power supply	12 VDC	
Consumption(without HDD)	≤ 10 W	≤ 20 W
Working temperature	-10 °C to +55 °C	
Working humidity	10% to 90%	
Dimensions (W × D × H)	315 × 242 × 45 mm	
Weight (without HDD)	≤ 1.16 kg	≤ 2 kg

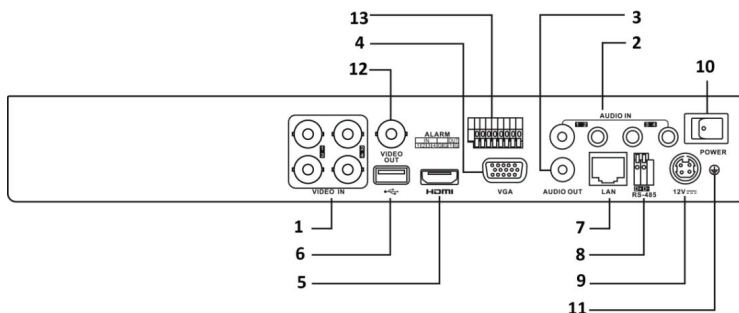

- | | |
|----|--------------------------|
| 1 | VIDEO IN |
| 2 | AUDIO IN, RCA Connector |
| 3 | AUDIO OUT, RCA Connector |
| 4 | VGA Interface |
| 5 | HDMI Interface |
| 6 | USB Interface |
| 7 | LAN Network Interface |
| 8 | RS-485 Serial Interface |
| 9 | 12 VDC Power Input |
| 10 | Power Switch |
| 11 | GND |
| 12 | VIDEO OUT |
| 13 | Alarm In/Out |