

IVN-21IR

IP VANDAL DOME IR




KEY FEATURES

- High performance Sony CMOS, 1080P
- dWDR, Deep base, **waterproof RJ45**
- H.264, dual-stream
- Max resolution:1920*1080
- Onvif and P2P supported
- IR Cut Filter
- 2pcs IR Array up to 20 meter
- IP66
- 2.8mm fix lens



SPECIFICATION	IVN-21IR
Sensor	1/2.8" SONY CMOS
Min Illumination	Color 0.1Lux@F1.2,white/black 0.01 Lux@F1.2
WDR Range	dWDR Range >80db
Video processing	H.264,dual-stream;CBR/VBR,32K~16M bit/S adjustable;1-30fps adjustable
Main stream	1920*1080,1-25fps 1280*720,1-25fps
Sub stream	720*576,1-25fps ; 640*480,1-25fps 640*352,1-25fps; 320*240,1-25fps
network Port	1 RJ45 ethernet network port,10M/100M self-adaption
Network protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP;
IR linkage	support
Reset interface	support
Operation function	Support WEB setting, OSD,real-time video transmission; motion detection; unified client remote management software, platform system application; complete SDK provided
Standard protocol	Onvif 2.4
Mobile monitor	Support P2P, (IOS, Android)
Power supply	DC10.8V~13.2V, PoE 550mA
Working temperature	-20C~55C
Protection rate	ESD 1kv
IR Series Distance	Max. 20 Meter with 2pcs IR Array
Lens	2.8mm fix lens
Camera size	106,62(L)×97,68(W)×92,08(H)

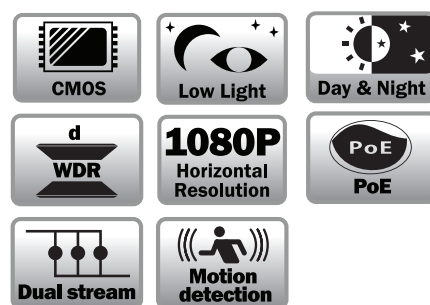

DIMENSIONS

