

# INVR-04ALPOE INVR-08AL2POE

NVR




## KEY FEATURES

- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920x1080P resolution
- 4/8-ch network cameras can be connected with 25M/50M incoming bandwidth
- 1 SATA interface at INVR-04ALPOE, 2 SATA interface at INVR-08AL2POE
- Plug & Play with up to 4/8 independent PoE network interfaces
- Support network detection, including network delay, packet loss, etc.




SPECIFICATION	INVR-04ALPOE	INVR-08AL2POE
Video/audio input		
IP video input	4-ch	8-ch
Two-way audio input:	1-ch, RCA (2.0 Vp-p, 1kΩ)	
Network		
Incoming bandwidth	25Mbps	50Mbps
Outgoing bandwidth	80Mbps	
Remote connection	128	
Video/Audio output		
Recording Resolution:	5MP / 3MP / 1080P / UXGA / 720P / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF	
Frame rate	Main stream: 50 fps	
	Sub-stream: 50 fps	
HDMI/VGA output	1-ch, resolution: 1920 x 1080P /60Hz, 1600 x 1200 /60Hz, 1280 x 1024 /60Hz, 1280 x 720 /60Hz, 1024 x 768 /60Hz	
Audio output	1-ch, RCA (Linear, 1kΩ)	
Decoding		
Live view / Playback resolution	5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF	
Synchronous playback	4-ch@1080P	8-ch@720P, 6-ch@1080P
Hard disk		
SATA	1 SATA interface for 1 HDD	2 SATA interface for 2 HDDs
Capacity	Up to 4TB	
External interface		
Network interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface	
USB interface	1 x USB 2.0 and 1 x USB 3.0	
PoE		
Interface	4 independent 100 Mbps PoE network interfaces	8 independent 100 Mbps PoE network interfaces
Max. Power	50W	120W
Supported standard	AF and AT	
General		
Power Supply	48V DC	220V AC
Consumption(without hard disk)	≤ 10W	
Working Temperature	-10 °C ~ +55 °C	
Working Humidity	10% ~ 90%	
Chassis	1U chassis	19-inch rack-mounted 1U chassis
Dimension	315 x 230 x 45mm	445 x 290 x 45mm
Weight(without HDD)	≤ 1 Kg	

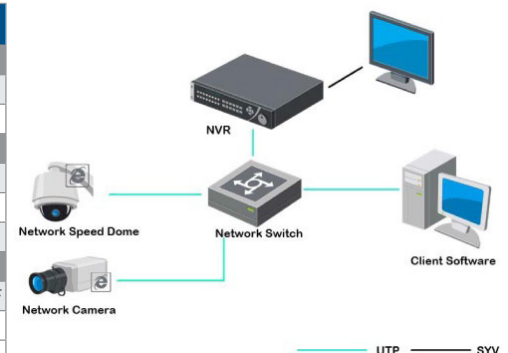


## REAR PANEL

INVR-04ALPOE



INVR-08AL2POE



1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. Power Switch
10. Network Interfaces with PoE Function