

INVR-08E304H1



Features and Functions

Key Features

- | H.265+/H.265/H.264+/H.264 video compression
- | Up to 50 Mbps incoming bandwidth, and 40 Mbps outgoing bandwidth
- | Up to 4/8-ch network camera inputs
- | Up to 4-ch@4 MP decoding capability
- | HDMI and VGA simultaneous output
- | Easy and stable Wi-Fi connection

Compression and Recording

- | H.265+ compression effectively reduces the storage space by up to 75%
- | Full channel recording at up to 4 MP resolution

Storage and Playback

- | 4-ch@4 MP (12 fps) or 4-ch@1080p (25 fps) playback resolution
- | 1 SATA interface (up to 6 TB capacity per HDD)


Smart Function

- | Supports line crossing and intrusion detection






Network & Ethernet Access

- | Dual external antenna design offers more powerful and stable signal
- | 1 self-adaptive 10/100 Mbps Ethernet interface
- | CTR-MAZi & DDNS (Dynamic Domain Name System) for easy network management

Model	INVR-08E304H1	
Wireless Parameter	Frequency band	2.4 GHz
	Antenna structure	2 × 2MIMO
	Transmission speed	144 Mbps
	Transmission standard	IEEE 802.11b/g/n
Video and Audio	IP video input	8-ch
	Incoming bandwidth	50 Mbps
	Outgoing bandwidth	40 Mbps
	HDMI output	1-ch, 1920×1080p/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz
	VGA output	1-ch, 1920×1080p/60Hz, 1280×1024/60Hz, 1280×720/60Hz, 1024×768/60Hz, HDMI/VGA simultaneous output
	Audio output	1-ch, RCA (linear, 1 KΩ)
	Audio decoding format	G.711ulaw, G.722, G.726, MP2L2
	Two-way audio	N/A
Decoding	Decoding format	H.265+/H.265/ H.264+/H.264
	Recording resolution	4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/ 2CIF/CIF/QCIF
	Playback mode	Normal/Smart, Event, Tag, Eternal File
	Synchronous playback	8-ch
	Live view window division	1/4/6/8/9
	Aux port window division	1/4/6/8/9
	Capability	4-ch@1080p (25 fps), 4-ch@4 MP (12 fps)
	Stream type	Video, Video & Audio
Network	Remote connections	16
	Network protocol	TCP/IP, DHCP, CTR-MAZi & DDNS, DNS, DDNS, NTP, SADP, SMTP, UPnP™
	Network interface	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Auxiliary interface	SATA	1 SATA interface
	Capacity	Up to 6 TB capacity for each disk
	Alarm in/out	N/A
	USB interface	Rear panel: 2 × USB 2.0
General	Power supply	12 VDC, 1.6 A
	Consumption (without HDD)	≤ 10 W
	Working temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Working humidity	10% to 90%
	Chassis	Mini 1U
	Material	Metal box
	Dimension (W × D × H)	265 × 246 × 48 mm (10.4" × 9.7" × 1.9")
	Weight (without HDD)	≤ 1.6 kg (3.5 lb)
Certification	FCC	Part 15 Subpart B, ANSI C63.4-2014
	CE	EN50130-4, EN 61000-3-2, EN 61000-3-3

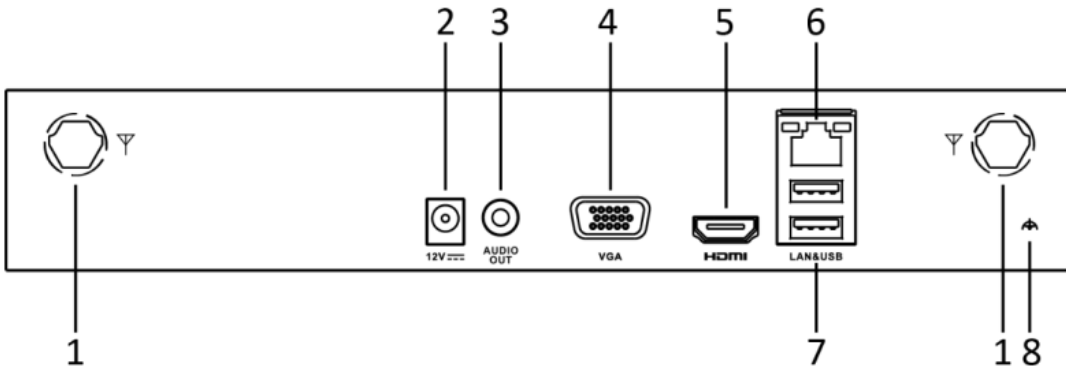

1	Dual Wi-Fi antenna	5	HDMI interface
2	Power supply	6	LAN network interface
3	AUDIO OUT	7	USB interface
4	VGA Interface	8	Ground

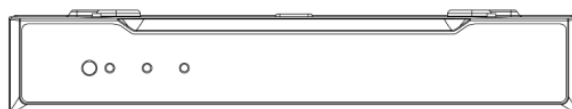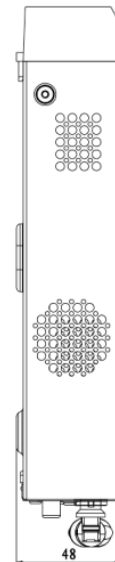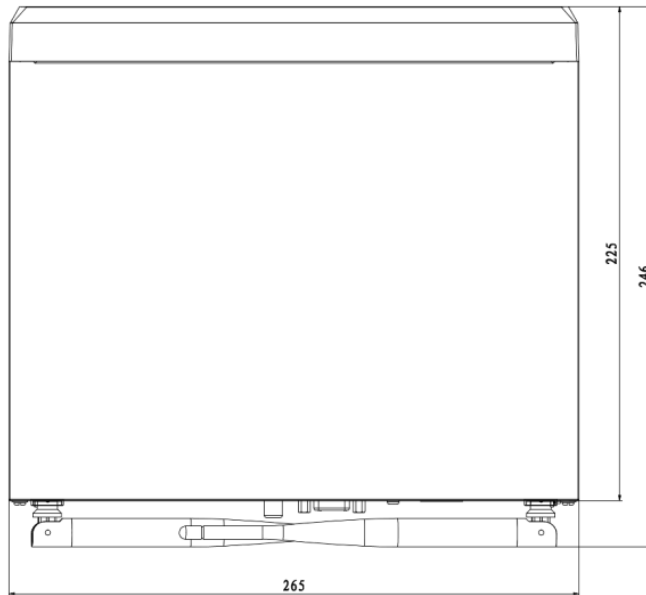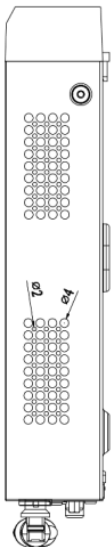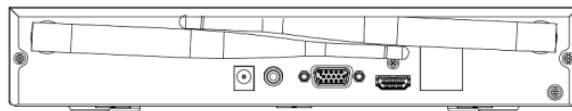

Unit: mm