

Item code: 70291-INVR-16L6008H2

Product description: NVR VALUE Series

Main features: Embedded Plug & Play 4K NVR 16 Channel: Support H.265/H.265+/H.264/H.264+/MPEG4; Incoming bandwidth 160 Mbps, Outgoing bandwidth 160 Mbps; USB interface Front/Rear panel: 1 × USB 2.0/1 × USB 3.0, Serial Interface: RJ-45 10/100 Mbps, Power supply: 100 ÷ 240 Vac.



SPECIFICATIONS

Video/Audio input	
IP video input	16-ch
Incoming bandwidth	160 Mbps
Outgoing bandwidth	160 Mbps
Video/Audio output	
HDMI output resolution	4K (3840 × 2160)/30 Hz, 2K (2560 × 1440)/60 Hz, 1920 × 1080/60 Hz, 1600 × 1200/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
VGA output resolution	1920 × 1080/60 Hz, 1280 × 1024/60 Hz, 1280 × 720/60 Hz, 1024 × 768/60 Hz
Audio output	1-ch, RCA (Linear, 1 KΩ)
Decoding	
Decoding format	H.265/H.265+/H.264/H.264+/MPEG4
Recording Resolution	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
Synchronous playback	16-ch
Capability	2-ch @ 8 MP (25fps)/4-ch @ 4 MP (30fps)/8-ch @ 1080p (30fps)
Network management	
Network protocols	TCP/IP, DHCP, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS
Hard disk	
SATA	2 SATA interfaces
Capacity	Up to 6 TB capacity for each HDD
External interface	
Network interface	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
Two-way audio	1-ch, RCA (2.0 Vp-p, 1kΩ)
USB interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 3.0
Alarm in/out	4/1
PoE interface	
Interface	16, RJ-45 10/100 Mbps self-adaptive Ethernet interface
Power	≤ 200 W
Supported standard	IEEE 802.3 af/at



BS OHSAS 18001:2007
Occupational Health and Safety Management System



ISO 9001:2015
Quality Management System



ISO 14001:2015
Environmental Management System




CI ITPI: 2015
100% Made in Italy Certificate



MAZi – Brand distributed by **LINCE ITALIA S.p.A.**
 Via Variante di Cancelliera s.n.c., 00072 Ariccia (RM) Italia
 Tel.: +39 06 92928252 - Fax: +39 06 92942586
www.lince.net – info@lince.net
MD-03.11 Rev. 6 - Pag.: 1 di 2

General	
Power supply	100 ÷ 240 Vac
Power	≤ 280 W
Consumption (without HDD)	≤ 15 W (without enabling PoE)
Working temperature	-10 °C + 55 °C (14 °F + 131 °F)
Working humidity	10% + 90%
Dimensions (W × D × H)	385 × 315 × 52 mm (15.2 × 12.4 × 2.0 inch)
Weight (without HDD)	≤ 3 kg (6.6 lb)

Physical Interfaces

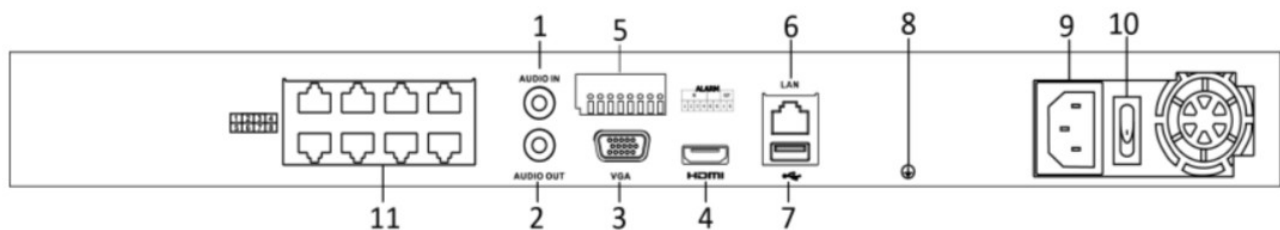

Index	Description	Index	Description
1	Audio IN	7	USB 3.0 interface
2	Audio OUT	8	GND
3	VGA interface	9	100 ÷ 240 Vac power supply
4	HDMI interface	10	Power Switch
5	Controller Port, Alarm In/Alarm Out	11	Network Interfaces with PoE function
6	LAN Network interface		