

# INVR-04AL/08AL INVR-08AL2/16AL2

NVR




## KEY FEATURES

- Third-party network cameras supported
- Up to 5 Megapixels resolution recording
- HDMI and VGA output at up to 1920x1080P resolution
- 4/8/16-ch network cameras can be connected with 25M/50M/100M incoming bandwidth
- 1 SATA interface at INVR-04AL/AL2  
2 SATA interfaces at INVR-08AL2/16AL2
- Support network detection, including network delay, packet loss, etc.




SPECIFICATION	INVR-04AL	INVR-08AL	INVR-08AL2	INVR-16AL2
<b>Video/audio input</b>				
IP video input	4-ch	8-ch	8-ch	16-ch
Two-way audio input:	1-ch, RCA (2.0 Vp-p, 1kΩ)			
<b>Network</b>				
Incoming bandwidth	25Mbps	50Mbps	50Mbps	100Mbps
Outgoing bandwidth	80Mbps			
Remote connection	128			
<b>Video/Audio output</b>				
Recording Resolution:	5MP / 3MP / 1080P / UXGA / 720P / VGA / 4CIF / DCIF / 2CIF / CIF / QCIF			
Frame rate	Main stream: 50 fps			
	Sub-stream: 50 fps			
HDMI/VGA output	1-ch, resolution: 1920 x 1080P /60Hz, 1600 x 1200 /60Hz, 1280 x 1024 /60Hz, 1280 x 720 /60Hz, 1024 x 768 /60Hz			
Audio output	1-ch, RCA (Linear, 1kΩ)			
<b>Decoding</b>				
Live view/Playback res.	5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF			
Synchronous playback	4-ch@1080P	8-ch@720P, 6-ch@1080P		16-ch@4CIF 12-ch@720P 6-ch@1080P
<b>Hard disk</b>				
SATA	1 SATA interface for 1 HDD		2 SATA interface for 2 HDDs	
Capacity	Up to 4TB			
<b>External interface</b>				
Network interface	1 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interface			
USB interface	1 x USB 2.0 and 1 x USB 3.0			
<b>General</b>				
Power Supply	48V DC	220V AC		
Consumption(without hard disk)	≤ 10W			
Working Temperature	-10 °C ~ +55 °C			
Working Humidity	10% ~ 90%			
Chassis	1U chassis	19-inch rack-mounted 1U chassis		
Dimension	315 x 230 x 45mm	445 x 290 x 45mm		
Weight(without HDD)	≤ 1 Kg			

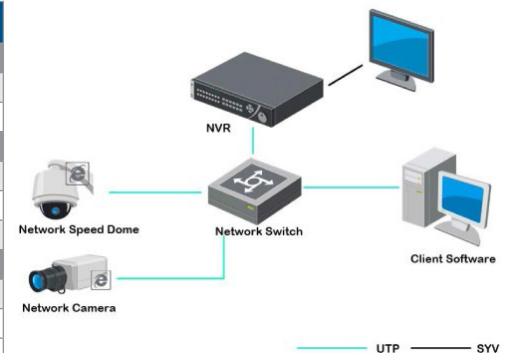

## REAR PANEL

INVR-04AL



INVR-08AL2



1. Power Supply
2. Audio In
3. HDMI Interface
4. LAN Network Interface
5. Audio Out
6. VGA Interface
7. USB Interface
8. Ground
9. Power Switch