

# IWN-23IR

IP BULLET IR




## KEY FEATURES

- High performance CMOS, 1080P resolution
- H.264, dual-stream
- Max resolution: 1920\*1080
- Onvif and P2P supported
- IR Cut Filter, dWDR
- 3pcs IR Array, up to 25 meter
- IP66
- 2.8mm fix lens



SPECIFICATION	IWN-23IR
System framework	Embedded Linux
Sensor	1/2.9" SONY CMOS
Minimum illumination	Color 0.1Lux@F1.2,white/black 0.01 Lux@F1.2
WDR Range	DWDR; DWDR Range>80db
video processing	H.264,dual-stream,CBR/VBR,32K~16M bit/S adjustable,1-30fps adjustable
Main stream	1920*1080,1-25(30)fps 1280*720,1-25(30)fps
Sub stream	720*576,1-25(30)fps ; 640*480,1-25(30)fps 640*352,1-25(30)fps; 320*240,1-25(30)fps
Network Port	1 RJ45 ethernet network port, 10M/100M self-adaption
Network protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP
IR linkage	support
Reset interface	support
Operation function	Support WEB setting, OSD,real-time video transmission; motion detection; unified client remote management software, platform system application; complete SDK provided
Standard protocol	Onvif 2.4
Mobile monitor	Support P2P, (IOS, Android)
Power supply	DC10.8V~13.2V, PoE / 450mA
Working temperature	-20C~55C
Protection rate	ESD 1kv
IR Series Distance	Max. 25 Meter with 3pcs IR Array
Lens	2.8mm fix lens
Camera size	63.09*210.5mm

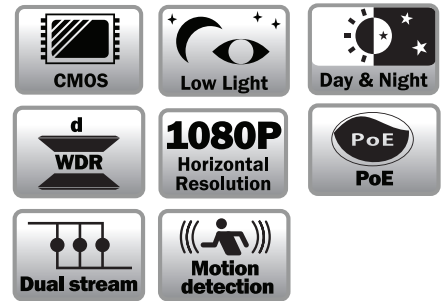

## DIMENSIONS

