

# IWN-23XR

IP BULLET IR




## KEY FEATURES

- High performance Sony CMOS, 1080P
- dWDR, waterproof RJ45
- H.264, dual-stream
- Max resolution: 1920\*1080
- Onvif and P2P supported
- IR Cut Filter
- 4pcs IR Array 42U IR Array up to 80 meter
- IP66, PoE, Hardware reset
- 3.6mm fix lens



SPECIFICATION	IWN-23XR
Sensor	1/2.9" SONY CMOS
Min Illumination	Color 0.1Lux@F1.2,white/black 0.01 Lux@F1.2
WDR Range	dWDR Range >80dB
SN Ratio	≥50db (AGC OFF)
Video processing	H.264,dual-stream;CBR/VBR,32K~16M bit/S adjustable;1-30fps adjustable
Main stream	1920*1080,1-25fps 1280*720,1-25fps
Sub stream	720*576,1-25fps ; 640*480,1-25fps 640*352,1-25fps; 320*240,1-25fps
Network Port	1 RJ45 ethernet network port,10M/100M self-adaption
Network protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP;
IR linkage	support
Operation function	Support WEB setting, OSD,real-time video transmission; motion detection; unified client remote management software, platform system application; complete SDK provided
Standard protocol	Onvif 2.4
Hardware reset	Supported
Mobile monitor	Support P2P, (IOS, Android)
Power supply	DC10.8V~13.2V, PoE 550mA
Working temperature	-20C~55C
Protection rate	ESD 1kv
IR Distance	Max. 80 meter with 4pcs 42U IR Array
Lens	3.6mm fix lens
Camera size	312.2(L) x 79,38 (H) mm

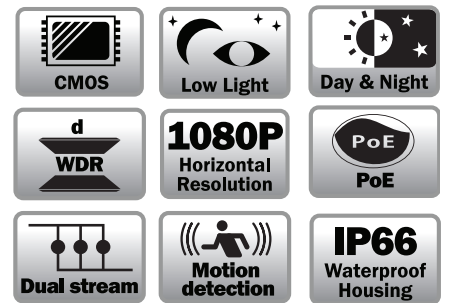

## DIMENSIONS

