

TVC-53IR

HD TVI IR DOME




KEY FEATURES

- 5.0 megapixel high-performance CMOS
- 2560 x 1944 resolution
- 2.8 mm fixed focal lens
- EXIR 2.0, smart IR, up to 20 m IR distance
- OSD menu, 2D DNR, dWDR
- 4 in 1 video output (switchable TVI/AHD/CVI/CVBS)
- IP67
- Up the coax



| SPECIFICATION | TVC-53IR |
|--------------------------|---|
| Camera | |
| Image Sensor | 5.0 megapixel progressive scan CMOS |
| Resolution | 2560 (H) × 1944 (V) |
| Min. illumination | 0.01 Lux@(F1.2, AGC ON), 0 Lux with IR |
| Shutter Time | 1/25 s to 1/50,000 s |
| Lens | 2.8 mm fixed focal lens |
| Horizontal Field of View | 85.5° |
| Lens Mount | M12 |
| Day & Night | IR cut filter |
| Angle Adjustment | Pan: 0° to 360°, Tilt: 0° to 75°, Rotate: 0° to 360° |
| Synchronization | Internal synchronization |
| Frame rate | 5 MP@20fps, 4 MP@25fps, 1080p@25fps |
| Menu | |
| AGC | Support |
| D/N Mode | Auto/Color/BW |
| White Balance | ATW/MWB |
| BLC | Support |
| dWDR | Support |
| Language | English |
| Functions | Brightness, Sharpness, DNR, Mirror, Smart IR |
| Interface | |
| Video Output | 1 HD analog output |
| Switch Button | TVI/AHD/CVI/CVBS |
| General | |
| Operating Conditions | -40 °C to 60 °C, humidity: 90% or less (non-condens.) |
| Power Supply | 12V DC±25% |
| Power Consumption | Max. 4.3 W |
| Protection level | IP67 |
| Material | Enclosure: Plastic Main body: Metal |
| IR Range | Up to 20 m |
| Communication | Up the coax |
| Dimensions | Ø 110 mm × 93.2 mm |
| Weight | Approx. 350g |

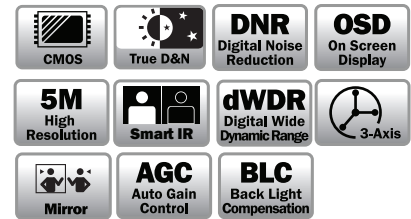

DIMENSIONS:

