


KEY FEATURES

- High performance CMOS, 4M resolution
- Audio and hardware reset
- H.264 and H.265, dual-stream
- Max resolution:2592*1520
- Onvif and P2P supported
- IR Cut Filter, Hardware reset, dWDR
- 3pcs IR Array, up to 25 meter
- IP66
- 3.6mm fix lens



SPECIFICATION		IWN-43IR
System framework	Embedded Linux	
Sensor	1/3 " CMOS	
Minimum illumination	Color 0.6Lux@F1.2, white/black 0.08Lux@F1.2	
video processing	H264, Baseline/Main Profile/High Profile code;H.265 Main Profile code,MJPEG code,dual-stream,support CBR/VBR code rate,32~16M k bit/S adjustable,1-30fps adjustable	
Main stream	2592*1520, 1-15 fps / 2048*1520, 1-25(30)fps (default) 1280*1080, 1-25(30)fps / 1280*720, 1-25(30)fps	
Sub stream	720*576,1-25(30)fps / 640*480,1-25(30)fps 640*352,1-25(30)fps / 320*240,1-25(30)fps	
Audio interface	Support 1 channel linear audio input, 1channel audio output	
Audio processing	G.711 coding Standard,Support bothway Voice intercom function,support the synchronization of audio and video	
Network Port	1 RJ45 ethernet network port, 10M/100M self-adaption	
Network protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP	
IR linkage	support	
Reset interface	support	
Operation function	Support WEB setting, OSD,real-time video transmission; motion detection; unified client remote management software, platform system application; complete SDK provided	
Standard protocol	Onvif 2.4	
Mobile monitor	Support P2P, (IOS, Android)	
Power supply	DC10.8V~13.2V, PoE - 450mA	
Working temperature	-20C~55C	
Protection rate	ESD 1kv	
IR Series Distance	Max. 25 Meter with 3pcs IR Array	
Lens	3.6mm fix lens	
Camera size	63.09*210.5mm	

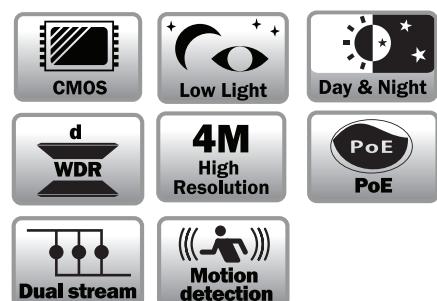

DIMENSIONS

