

IWN-43XR

IP BULLET IR




KEY FEATURES

- High performance OV CMOS, 4M resolution
- dWDR, audio, hardware reset, waterproof RJ45
- H.264 and H.265, dual-stream
- Max resolution: 2592*1520
- Onvif and P2P supported
- IR Cut Filter
- 4pcs 42U IR Array up to 80 meter
- IP66, PoE
- 6mm fix lens



SPECIFICATION	IWN-43XR
Sensor	1/3" OV CMOS
Min Illumination	Color 0.6Lux@F1.2, white/black 0.08Lux@F1.2
WDR Range	dWDR Range >80dB
Video processing	H264, Baseline/Main Profile/High Profile code;H.265 Main Profile code,MJPEG code,dual-stream,support CBR/VBR code rate,32~16M k bit/S adjustable,1-30fps adjustable
Main stream	2592*1520, 1-15 fps / 2048*1520, 1-25fps (default) 1280*1080, 1-25fps / 1280*720, 1-25fps
Sub stream	720*576,1-25fps / 640*480,1-25fps 640*352,1-25fps / 320*240,1-25fps
Audio interface	Support 1 channel linear audio input / 1channel audio output
Audio processing	G.711 coding Standard,Support bothway Voice intercom function,support the synchronization of audio and video
Network Port	1 RJ45 ethernet network port, 10M/100M self-adaption
Network protocol	RTSP/FTP/PPPOE/DHCP/DDNS/NTP/UPnP
IR linkage	supported
Operation function	Web setting, OSD, real-time video transmission, motion detection, MJPEG capture, client-side remote management software, complete SDK
Standard protocol	Onvif 2.4
Mobile monitoring	P2P, (IOS, Android)
Power supply	DC10.8V~13.2V/PoE, 650mA
Working temperature	-20C~55C
Protection rate	ESD 1kv
IR Distance	Max. 80 meter with 4pcs 42U IR Array
Lens	6mm
Camera size	312.2(L)×79.38(W)

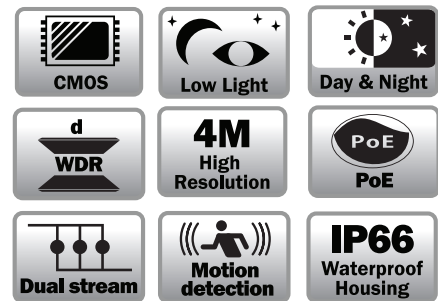

DIMENSIONS

